

SOLAR VOLT : Model GP60-250W

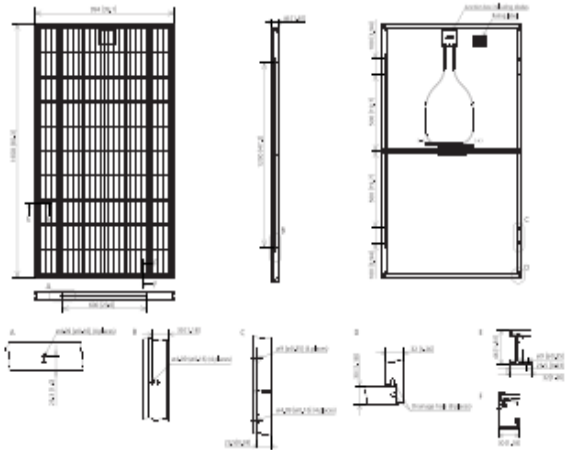
Electrical Characteristics

Maximum Power (Pmp)	250	W +/- 2%
Open Circuit Voltage (VOC)	37.3	V
Voltage at Maximum Power (Vmp)	30.5	V
Maximum System Voltage (Vdc)	1000	V
Short Circuit Current (Isc)	8.52	A
Current at Maximum Power (Imp)	8.04	A
Module Efficiency	15	%
Operating Temperature	-40c	+85c
Temperature coefficient	-0.5%	DegC
NOCT	+/-	2%

Materials Certification

GLASS	ISO 14001
EVA	TUV Z088110822
CELLS High Efficiency 17.6% Poly Crystalline	TUV CERTIFIED
BACK SHEET	CSQ 9190.COV3
JUNCTION BOX	TUV 0010-21166246009

Physical/Mechanical Characteristics

	CELLS	60 cells 156*156 mm Poly
	Weight	20 KG
	Glass L * W * D	1650 * 995 * 32 mm
	Frame	40 mm anodised Aluminium
	Junction Box	IP65 5 bypass Diodes

Tiba Solar factory: new Cairo, 5th district, industrial zone

Tel: +2-012-077-7202

Website: www.tibasolar.com

Email: info@tibasolar.com – tibasolar@gmail.com

Google maps 29.974634, 31.489651